

Test Leads

52F series







CAT IV 1000V



CAT II 1000V (can be used with alligator clips)

- Terminal: 4mm banana plug
- Wire: PVC UL 1803 or silicone
Length: 1100±30mm
Outside diameter: 4.0mm
Braided copper wires: 170 / 0.08mm
- Removable test lead cap for attaching alligator clips
- Rating: EN 61010-031
CAT IV 1000V 0.5A / CAT IV 690V 2A
CAT IV 500V 10A / CAT IV 250V 10A

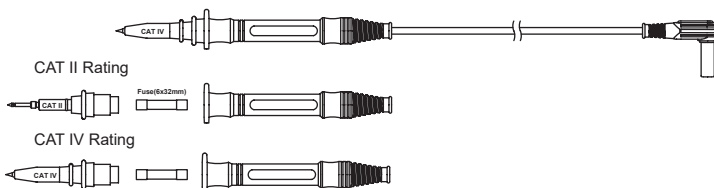

Model	L=Terminal	X=tip(mm)	Y=Fuse Rating	Z=Voltage Rating	Wire (Option)
C5FX-YAZ	—	2	250V Fuse Rating 0.5-10A	1=250V	—
	—	4	500V Fuse Rating 0.5-10A	2=500V	—
	—	2-4	690V Fuse Rating 0.5-2A	3=690V	—
52F-LX-YAZ	L	2	1000V Fuse Rating 0.5A	4=1000V	PVC Wire Silicone Wire
	L	4			
	L	2-4			
52F-IX-YAZ	I	2			
	I	4			
	I	2-4			

X=2,4,2-4 (tip type) Y=0.5-10 (fuse rating)

Z=1-4 (voltage rating)

AL-8000 R



- Large test probe handle
- Double insulated silicone wire, 1.1m
- Safety straight input plug connect
- ⚠ **WARNING:**
ONLY AVAILABLE FOR INSULATION TESTER
- Rating:
EN 61010-031 CAT III 5kVdc 2mA