


Test Leads



- **Wire:** PVC UL 1803 / 18AWG
Length: 1100±30mm
Outside diameter: 4.0mm
Temperature tolerance range: -40°C~105°C
Braided copper wires: 170 / 0.08mm
- **Terminal:**
105° angle 4mm nickel-plated brass banana plug with caged and insulated sheathing to avoid brass oxidation
- **Rating:**
EN 61010-031
CAT III 1000V 10A / CAT IV 600V 10A
- **Probe tip type:**
AL-11-1: 2mm, AL-11-3: 4mm, AL-11-5: 2-4mm (screw spiral)

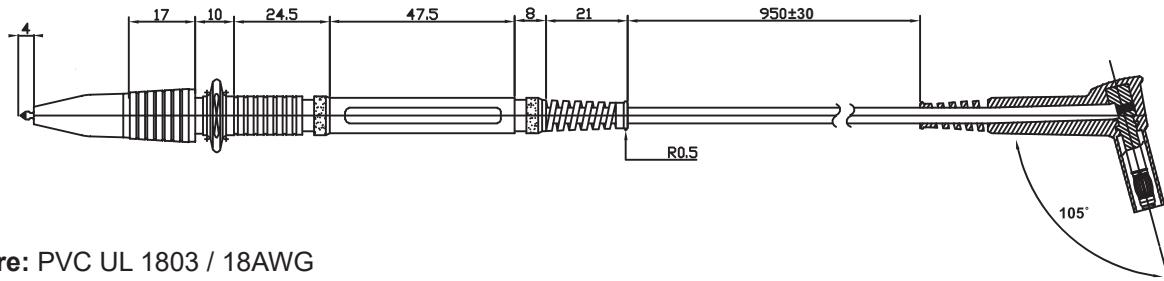

AL-11-1

With cap, CAT III 1000V / CAT IV 600V



AL-11-3



AL-11-5



AL-11-1

Without cap, CAT II 1000V
(can be used with alligator clips)



AL-11-3



AL-11-5