


Test Leads

Patented connector at test lead and terminal

Test leads for meters and testers are highly susceptible to poor contact and damage.

SEW's patented screw end has completely offset the bending stresses, which makes it highly durable and long lasting.

- Patent No.
U.S.A US 6,265,668 B1
GERMANY 299 12 812 • 1
CHINA ZL 99 2 16904 • 6

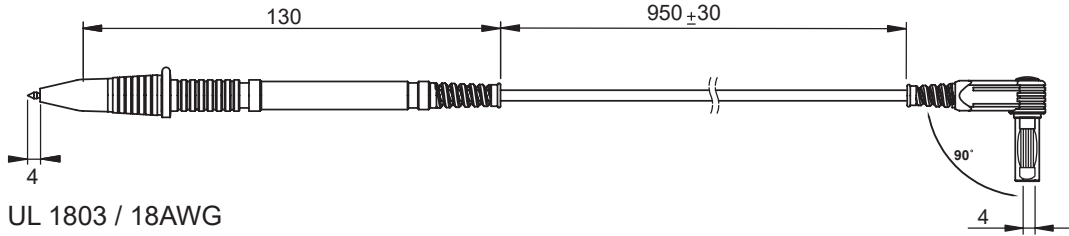

- **Wire:** PVC UL 1803 / 18AWG
Length: 1100±30mm
Outside diameter: 3.50mm
Temperature tolerance range: -40°C ~ 105°C
Braided copper wires: 64 / 0.12mm
- **Terminal:**
Right-angle 4mm nickel-plated brass banana plug with caged and insulated sheathing to avoid brass oxidation
- **Rating:**
EN 61010-031
CAT III 1000V 10A / CAT IV 600V 10A
- **Probe tip type:**
AL-24-1: 2mm, AL-24-3: 4mm, AL-24-5: 2-4mm(screw spiral)

