

Test Leads

Patented connector at test lead and terminal

Test leads for meters and testers are highly susceptible to poor contact and damage.

SEW's patented screw end has completely offset the bending stresses, which makes it highly durable and long lasting.

- Patent No.

U.S.A



US 6,265,668 B1

GERMANY

299 12 812 • 1

CHINA

ZL 99 2 16904 • 6

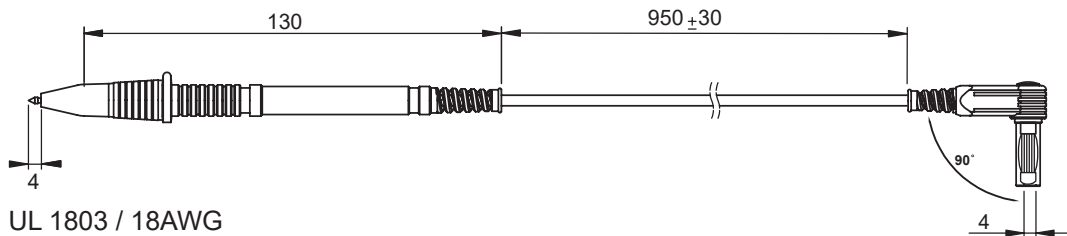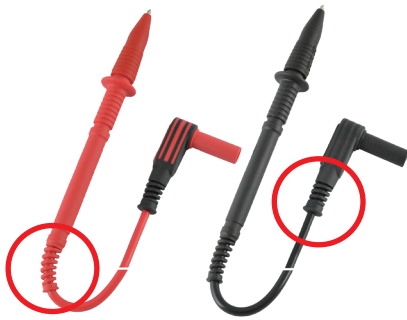

- Wire:** PVC UL 1803 / 18AWG
 Length: 1100±30mm
 Outside diameter: 3.50mm
 Temperature tolerance range: -40°C ~ 105°C
 Braided copper wires: 64 / 0.12mm
- Terminal:**
 Right-angle 4mm nickel-plated brass banana plug with caged and insulated sheathing to avoid brass oxidation
- Rating:**
 EN 61010-031:2015
 CAT III 1000V 10A / CAT IV 600V 10A
- Probe tip type:**
 AL-24-1: 2mm, AL-24-3: 4mm, AL-24-5: 2-4mm(screw spiral)



AL-24-1


CAT III 1000V / CAT IV 600V



AL-24-3



AL-24-5

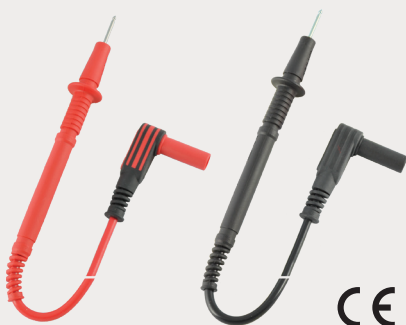


AL-24-1

CAT II 1000V

(can be used with alligator clips)



AL-24-3

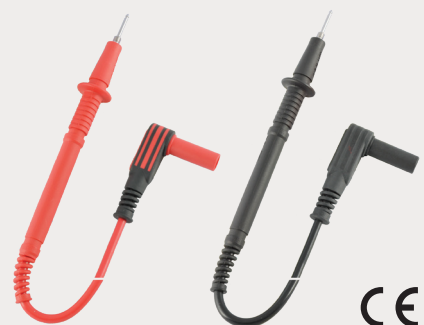

AL-24-5