


## Test Leads



- **Wire:** PVC UL 1803 / 18AWG  
Length: 1100 ± 30mm  
Outside diameter: 4.0mm  
Temperature tolerance range: -40°C ~ 105°C  
Braided copper wires: 170 / 0.08mm
- **Terminal:**  
Right-angle 4mm nickel-plated brass banana plug with caged and insulated sheathing to avoid brass oxidation
- **Rating:**  
EN 61010-031  
CAT IV 1000V 10A
- **Probe tip type:**  
AL-28-1: 2mm, AL-28-3: 4mm, AL-28-5: 2-4mm(screw spiral)

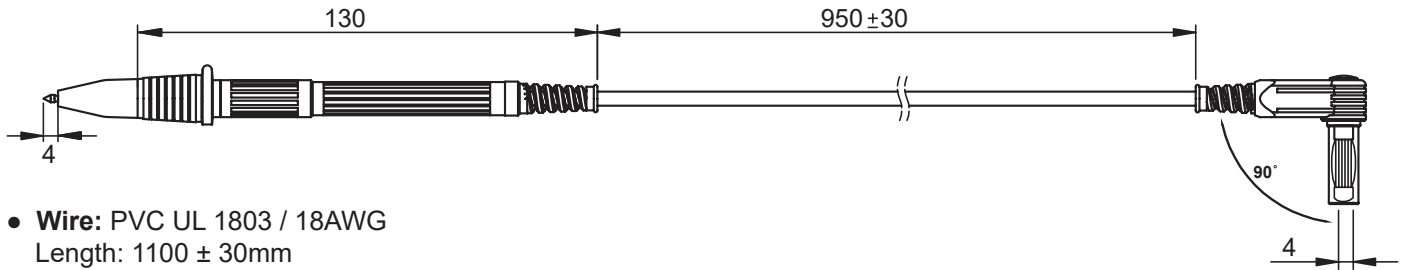

**AL-28-1**

With cap, CAT IV 1000V

**AL-28-3**

**AL-28-5**



**AL-28-1**

Without cap, CAT II 1000V  
(can be used with alligator clips)

**AL-28-3**

**AL-28-5**