


Test Leads



- **Wire:** PVC UL 1803 / 18AWG
Length: 1100 ± 30 mm
Outside diameter: 4.0mm
Temperature tolerance range: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Braided copper wires: 170 / 0.08mm
- **Terminal:**
Right-angle 4mm nickel-plated brass banana plug with caged and insulated sheathing to avoid brass oxidation
- **Rating:**
EN 61010-031:2015
CAT IV 1000V 10A
- **Probe tip type:**
AL-28-1: 2mm, AL-28-3: 4mm, AL-28-5: 2-4mm(screw spiral)

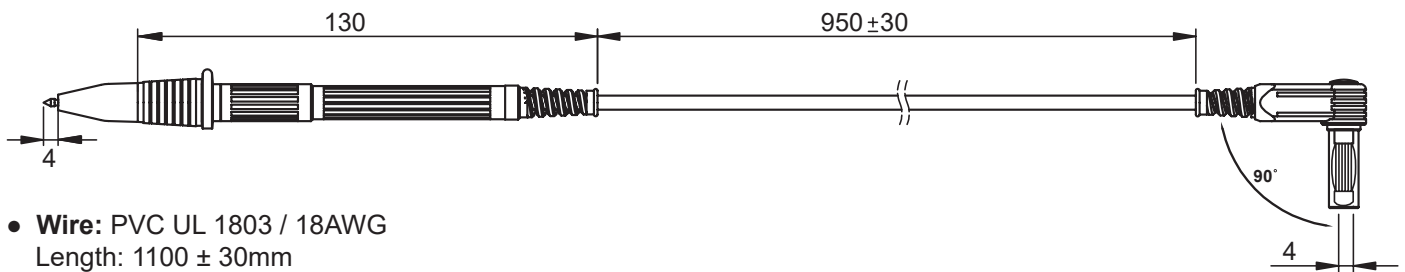

AL-28-1


CAT IV 1000V



AL-28-3



AL-28-5

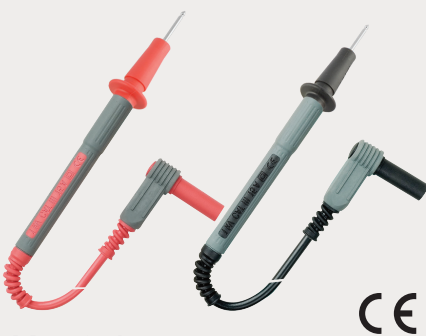


AL-28-1

CAT II 1000V

(can be used with alligator clips)



AL-28-3

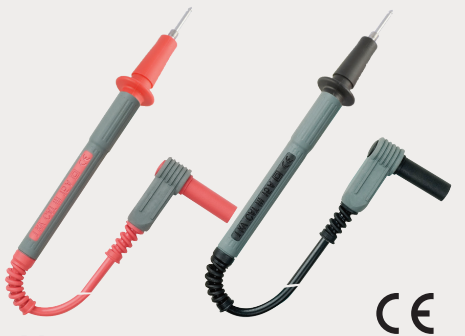

AL-28-5