

Test Leads

AL-30A



- Wide-grip alligator clips with integral finger guard and large 35mm high-tension spring mouth
- Double insulated silicone wire, 1m
- Safety straight input plug
- Rating: EN 61010-031 CAT III 1000V 10A


AL-30AR Red**AL-30AB Black****AL-30AG Green****AL-30AL:** 90° angle 4mm banana plug

AL-30H



- Spring-shrouded 4mm brass caged banana probe tip
- Double insulated silicone wire, 1m
- Safety straight input plug
- Rating: EN 61010-31 CAT III 1000V 10A
- AL-30HB Black
- Test tip 4mm: CAT III 1000V
- Test tip 17mm: CAT II 1000V

AL-32,AL-32F

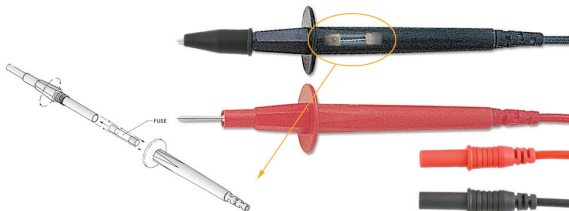

- 2mm probe tip
- Double insulated silicone wire, 1m
- Safety straight input plug
- Rating: EN 61010-31 CAT III 1000V 10A

AL-32R Red, AL-32B Black

- **AL-32F:** fused version of **AL-32**

Fuse size: 6×32mm


Rating: EN 61010-031

CAT III 250V 10A / 500V 10A / 690V 2A

AL-32FR Red, AL-32FB Black

- Test tip 4 mm: CAT III 1000V
- Test tip 17 mm: CAT II 1000V

AL-33

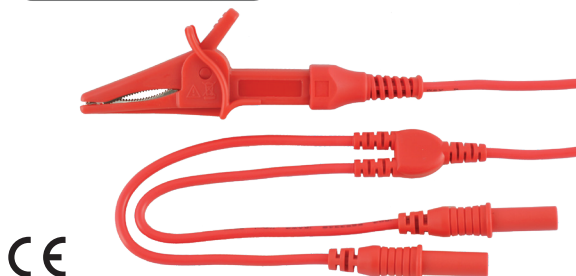

- Simplified measurement probe for earth resistance tester use
- Wide-grip alligator clips with integral finger guard and large 35mm high-tension spring mouth
- PVC-insulated wire with branched straight input plugs, 1m
- Rating: EN 61010-31 CAT III 600V 10A

AL-34B



- Wide-grip alligator clips with integral finger guard and large 35mm high-tension spring mouth
- PVC-insulated wire, 60cm (65 / 0.127mm)
- Right-angle connectors
- Rating: EN 61010-031 CAT III 600V 10A