


## Adapter / Alligator Clip


### AL-39C



- Solid copper spade lug
- Y-shaped tip accepts housings or screws with a diameter of 6.5mm or less
- Fully insulated, axial mount 4mm banana jack
- Designed especially for terminal posts




### AL-19C series



CE

- **AL-19C-1** For 2mm probe tip
- **AL-19C-3** For 4mm banana plug
- Rating: EN 61010-031  
CAT III 1kV 10A  
CAT IV 600V 10A


### AL-20C series



CE

- **AL-20C-1** For 2mm probe tip
- **AL-20C-3** For 4mm banana plug
- **AL-20C-5** For 4mm screw
- Rating: EN 61010-031  
CAT III 1kV 10A  
CAT IV 600V 10A

### AL-21C



For 4mm banana plug

### AL-21C 2-4



For 4mm screw

### AL-22C




For 4mm banana plug

### AL-23CA




CE

### AL-23CA



- For 4mm banana plug
- Rating:  
EN 61010-031  
CAT IV 1kV 20A

### AL-23CA 2-4

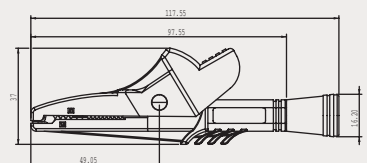

- For 4mm screw
- Rating:  
EN 61010-031  
+ A1:2008 CAT IV 1kV 20A