



Test Leads

AL-50

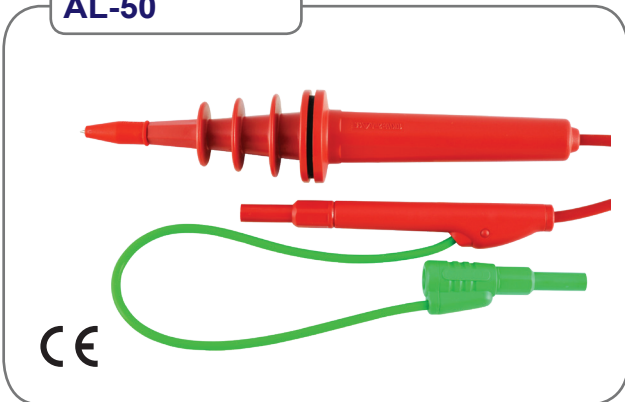


- Large test probe handle with shrouded 4mm brass caged banana plug tip
 - Super insulated silicone wire, 2.7m
Outside diameter: 6.5mm
 - Safety straight input plug connect with extra green guard
- ⚠ WARNING:**
INPUT: MAX. AC 1000V
OUTPUT: MAX. DC 10kV. 3W
ONLY AVAILABLE FOR INSULATION TESTER
- Rating:
EN 61010-031 CAT III 10kVdc 2mA


AL-51

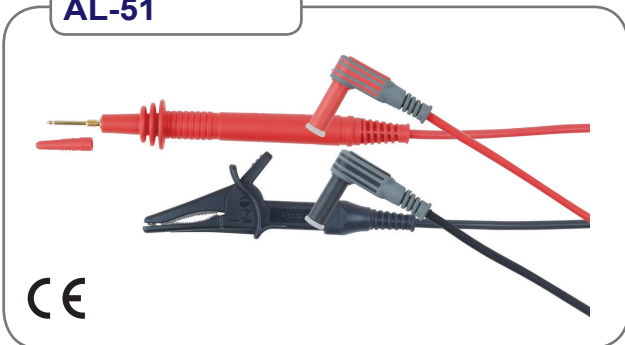

- **Terminal** : 4mm banana plug
- **Wire** : PVC UL1803
Temperature tolerance range -40°C ~ 105°C
Outside diameter : 4mm
Braided copper wires (180 of 0.12mm)
Length : 1100±30mm
- Rating : EN 61010-031 CAT IV 1000V 15A




54F series


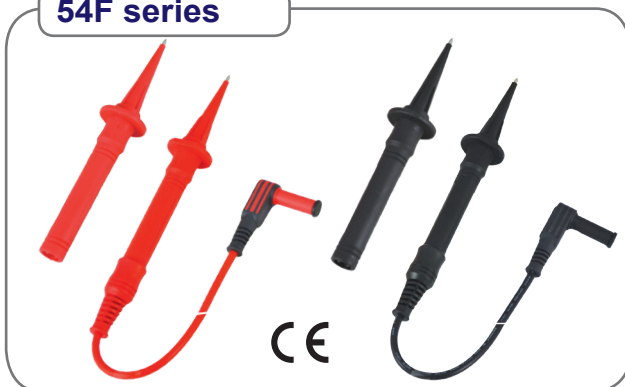


- Terminal: 4mm banana plug
- Probe tip: 2mm
- Wire: PVC UL 1803 or silicone
Length: 1100±30mm
Outside diameter: 4.0mm
Braided copper wires: 170 / 0.08mm
- Rating:
EN 61010-031
CAT IV 1000V 0.5A / CAT IV 690V 2A
CAT IV 500V 10A / CAT IV 250V 10A

Terminal Type

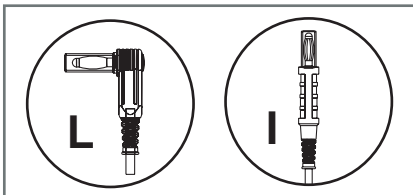

Probe Tip

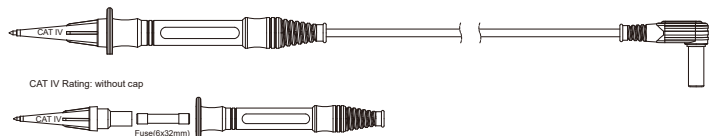

Model	Terminal Type	Fuse Rating	Voltage Rating
54F = PVC wire 54FS = Silicone wire	L = right-angle plug I = straight plug	250V fuse rating 0.5~10A 500V fuse rating 0.5~10A 690V fuse rating 0.5~2A 1000V fuse rating 0.5	1 = 250V 2 = 500V 3 = 690V 4 = 1000V

C54F2	-	0.5A~10A	1,2,3,4
54F2	L, I	0.5A~10A	1,2,3,4
54FS2	L, I	0.5A~10A	1,2,3,4