



Test Leads

AL-9005

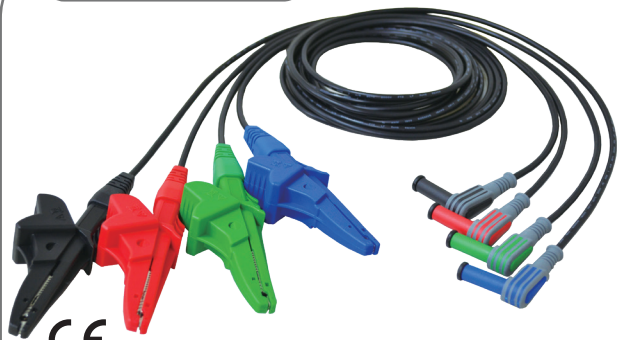

- Wide-grip alligator clips with integral finger guard and large 25mm high-tension spring mouth
- PVC-insulated wire with branched straight input plugs, 1.5m
- Right-angle connectors
- Rating:
EN 61010-31 CAT IV 600V 10A

TEL-4136C

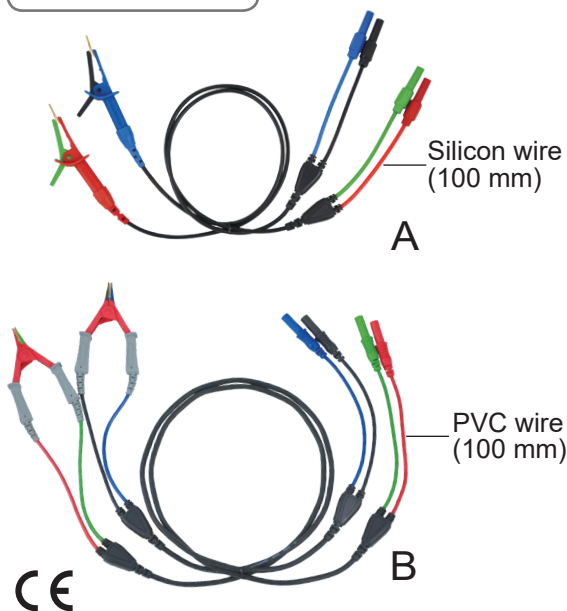

Model name: Kelvin clip test leads

Model A

- Wire length: 700±30mm
PVC insulated wire (600mm) with connected straight input plugs (100mm silicon wire)
Outside diameter: 4.0mm
- Input plug color: Red•Green•Black•Blue

Model B


- Wire length: 1000±30mm
PVC insulated wire (900mm) with connected straight input plugs (100mm PVC wire)
Outside diameter: 4.0mm
- Input plug color: Red•Green•Black•Blue
- Rating: EN 61010-031
CAT IV 150V 3A

TEL-AL11-6A



- Terminal: 4mm banana plug
- Wire: PVC UL 1803
Length: 1100±30mm
Braided copper wires: 200 / 0.08mm
Temperature tolerance range: -40°C~105°C
Color: Red and Black each (set)
- Rating:
EN 61010-031 CAT III 600V 15A

TEL-AL11-7A

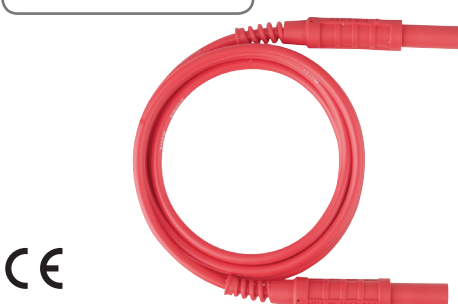

- Terminal: 4mm banana plug
- Wire: PVC UL 1803
Length: 1100±30mm
Outside diameter: 4.0mm
Braided copper wires: 200 / 0.08mm
Temperature tolerance range: -40°C~105°C
Color: Red and Black each (set)
- Rating: EN 61010-031 CAT III 600V 15A