

Test Leads

AL11-8A, AL11-8AS



CE

- Terminal: 4mm banana plug and 4mm banana jack
- **AL-11-8A** wire: PVC UL1803 18AWG
- **AL-11-8AS** wire: Silicon UL3239 18AWG
- Length: 1100mm ± 30mm
- Color: Red and Black(set)
- Rating:
EN 61010-031 CAT III 1000V 10A

AL-27



- Wire: PVC UL 1803 / 18AWG
Length: 1100±30mm
Outside diameter: 3.50mm
Temperature tolerance range: -40°C~105°C
Braided copper wires : 64 / 0.12mm
- Terminal:
Right angle 4mm brass (nickel plated) banana plug
- Rating:
CAT III 1000V 10A / CAT IV 600V 10A
- Probe tip: 2mm


AL-29, AL-29L



CE

- Wire: PVC UL 1803 / 18AWG
Length: 1100±30mm
Outside diameter: 3.50mm
Temperature tolerance range: -40°C~105°C
Braided copper wires: 64 / 0.12mm
- Terminal:
AL-29: Straight input plug
AL-29L: Right angle input plug
- Rating:
EN 61010-031
CAT IV 600V / CAT III 1000V 10A
- Probe tip: 2mm
- Test tip 4 mm: CAT IV 600V / CAT III 1000V
Test tip 17 mm: CAT II 1000V

AL-30, AL-30F

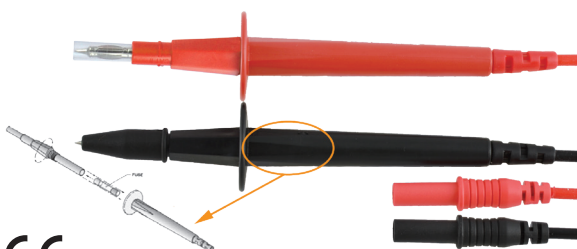

CE

- Spring-shrouded 4mm brass caged banana probe tip
- Double insulated silicone wire, 1m
- Safety straight input plug
- Rating: EN 61010-31 CAT III 1000V 10A
AL-30R Red, AL-30B Black, AL-30G Green
- **AL-30F:** fused version of **AL-30**
Fuse size: 6×32mm
Rating: EN 61010-031 CAT III 250V 10A / 500V 10A / 690V 2A
AL-30FR Red, AL-30FB Black
- Test tip 4 mm: CAT III 1000V
Test tip 17 mm: CAT II 1000V