

TEST BOX

Functional checking for RCD testers,
Loop testers and Insulation/Continuity testers




FEATURES

- Wide range of operating voltage from AC 210V/50Hz to 250V/50Hz
- Checks AC voltage
- Checks RCD tester's test current & time in A(ms)
- Checks loop testers
- Checks wiring (Phase, Neutral, Earth)
- Checks continuity
- Checks insulation (1.2kV maximum)
- Comply with UK16th edition
- Safety standard: EN 61010-1 / EN 61326-1

LAYOUT OF THE FRONT PANEL

SEW

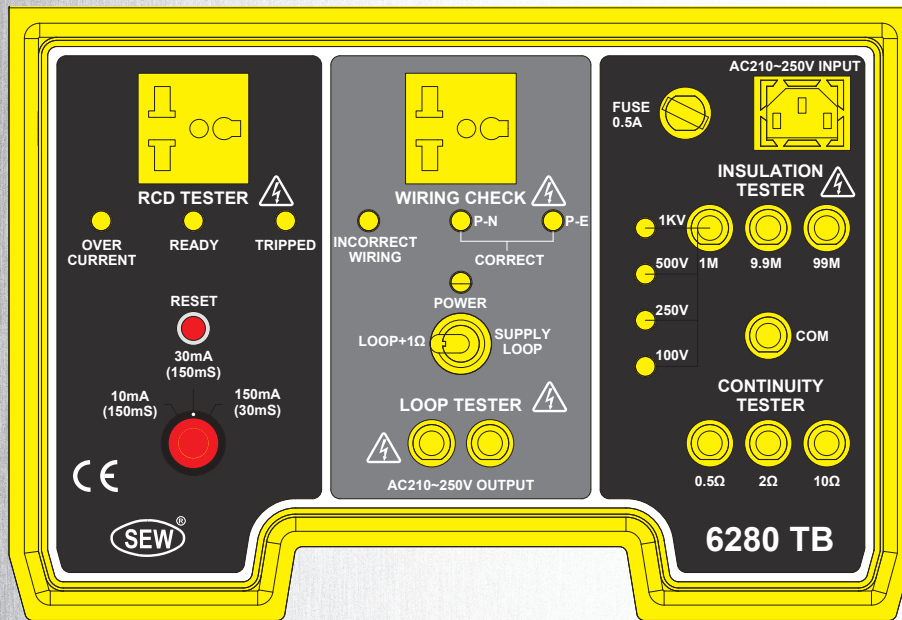


- 6280 TB is an ideal tool which provides verifications of Insulation testers, Continuity testers, RCD testers and Loop testers.

SPECIFICATIONS


RCD Testing

Range	10mA @ 150ms
	30mA @ 150ms
	150mA @ 30ms
Accuracy	± 10%

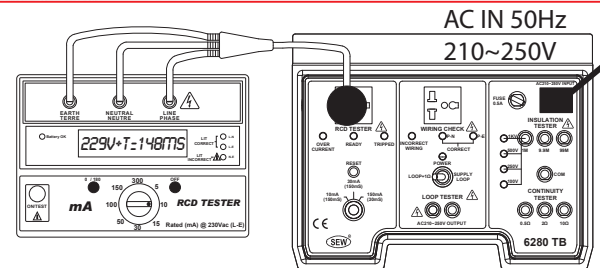


Insulation Testing

Range	1MΩ / 9.9MΩ / 99MΩ
Accuracy	± 1%
Max. testing	1.2kV

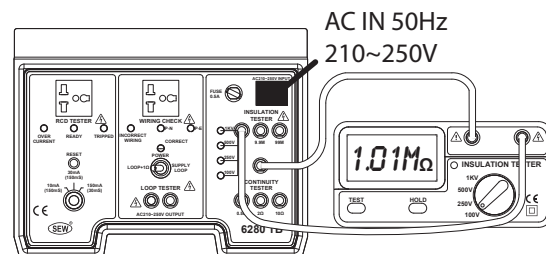

Continuity Testing

Range	0.5Ω / 2Ω / 10Ω
Accuracy	± 0.05Ω / ± 0.1Ω / ± 0.2Ω
Max. current	300mA

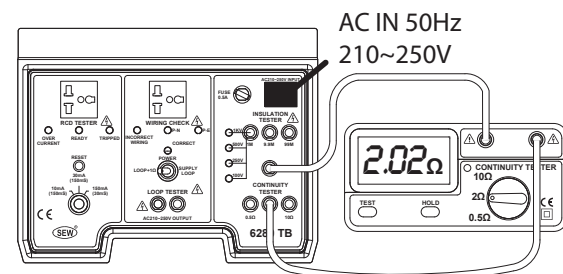

LOOP Testing

Range	Supply Loop / Supply Loop +1Ω
Accuracy	0.45Ω ± 0.05Ω / 1.45Ω ± 0.05Ω

- Dimension : 330(L)x260(W)x160(D)mm
- Weight : Approx. 2570g

